

International Carrier-to-Carrier Connectivity

No routing complexity. No fiber dependency. Any network.



NNIs require weeks of manual coordination




Visibility and control end at your edge



International fiber is costly and fragile

Instant Interconnection

NNIs directly from your infrastructure. Ethernet over fiber or DIA.

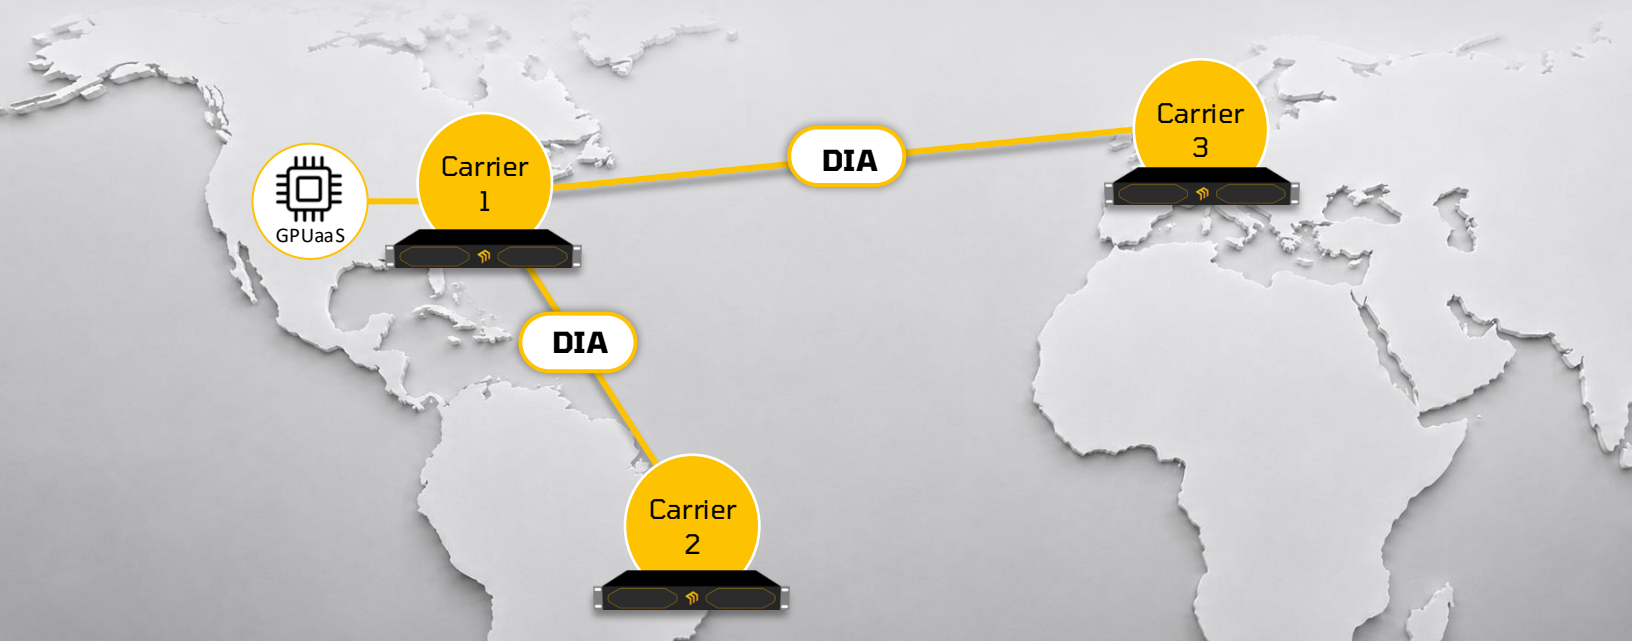

AUTOMATED

Private paths in minutes.
No routing complexity.

VISIBLE

Telemetry and SLA control beyond the edge.

RESILIENT

Deterministic Layer 2 paths. Any transport.



Path Border Controller (PBC)

- 1 RU device at your edge
- Dual 100G interfaces
- Private Ethernet paths

Path Computation Engine (PCE)

- Carrier-neutral NNI engine
- Cloud-native orchestration
- Hop-by-hop telemetry